


HEAT
WATER TO
180°F

HOTBATCH

Batchwater Tank Heaters

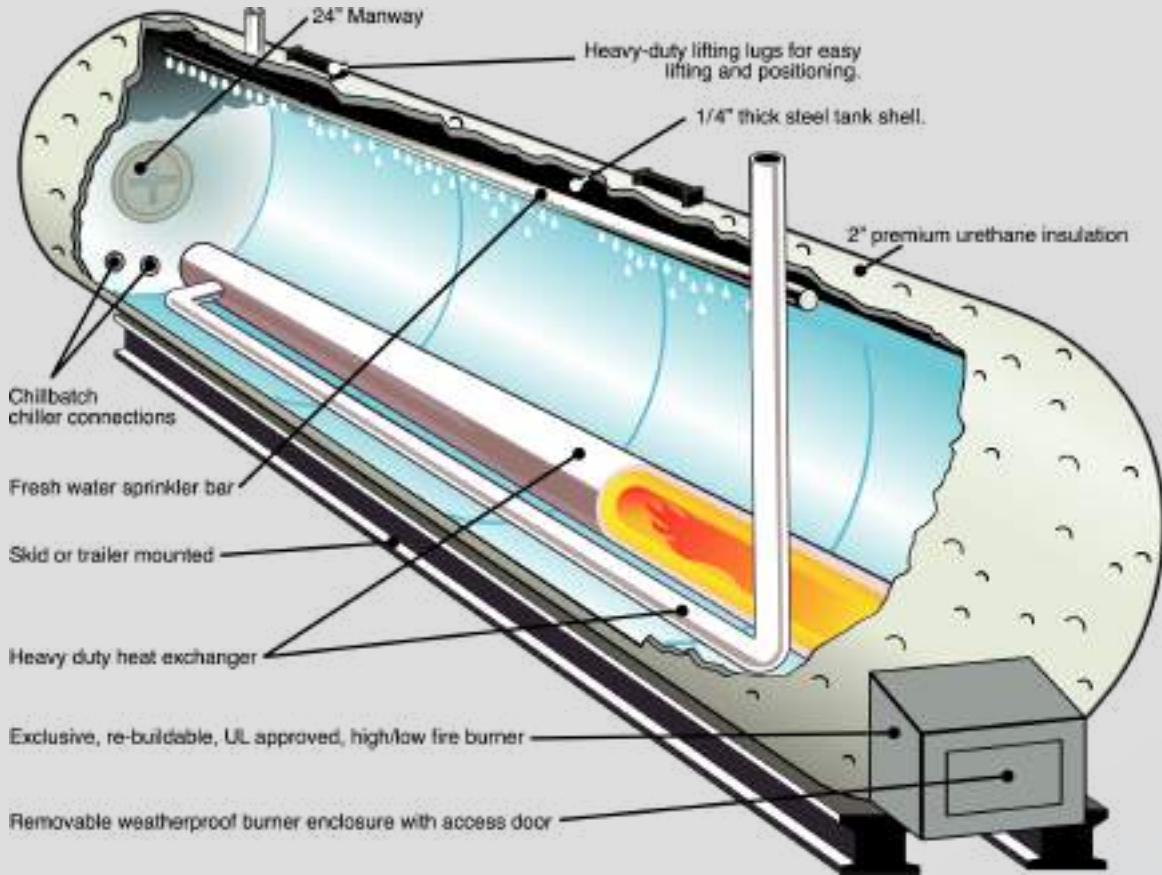

American Geothermal Hotbatch Tank Heaters are the perfect solution for producers that require large capacity heating (up to 180°F) and on-site storage. The Hotbatch comes stock with 2" thick, premium urethane insulation with the best insulative properties in the industry. Hotbatch also features our custom, UL approved, multi-fuel, re-buildable burner. All Hotbatch Tank Heaters are built to pair with American Geothermal Chillbatch Chillers for the ultimate heating and cooling system, and every heater can be trailer or skid mounted for mobility.

Model Number	Volume (US gal)	Diameter	Length	Max GPH @ 100°F Rise	Gal available for first hour	Max gal in 8hr
HB05K0.8M	5,000	100"	17.5'	771gal	5,771gal	11,168gal
HB10K1.1M	10,000	100"	17.5'	1060gal	11060gal	18,480gal
HB10K1.8M	10,000	100"	31'	1735gal	11,735gal	23,880gal
HB10K3.4M	10,000	100"	31'	3277gal	13,277gal	36,216gal
HB15K1.8M	15,000	124"	30'	1735gal	16,735gal	28,880gal
HB15K3.4M	15,000	124"	30'	3277gal	18,277gal	41,216gal

- Heats to 180°F
- UL approved re-buildable, multi-fuel burner
- No boiler inspection required
- Fully customizable

Sterling Concrete Equipment
937-747-4300
www.SterlingConcreteEquipment.com